

MDL-C-400/1~50mW



**LONG COHERENT LENGTH
DIODE LASER AT 400nm**



Long coherent length diode laser module at 400nm is made features of long coherent length, stable wavelength, long lifetime and easy operating, which is widely used in holography, interference, fluorescence, photoetching, flow cytometry, DNA sequencing, Raman spectroscopy, Laser radar, precision measurement, etc.



SPECIFICATIONS

| | |
|--|---|
| Wavelength (nm) | 400±5 |
| Operating mode | CW |
| Output power (mW) | >1, 2, 3, ...,50 |
| Power stability (rms, over 4 hours) | <1%, <3%, <5% |
| Transverse mode | Near TEM ₀₀ |
| Coherent length (m) | >1 |
| M ² factor | <1.5 |
| Beam diameter at the aperture (1/e ² ,mm) | ~2.5 |
| Beam divergence, full angle (mrad) | 0.5 |
| Polarization ratio | >50:1 (>100:1, optional) Horizontal±5 degree (Vertical Optional) |
| Warm-up time (minutes) | <15 |
| Beam height from base plate (mm) | 30 |
| Operating temperature (°C) | 20~30 |
| Power supply (85-264VAC) | PSU-III-FDA |
| Expected lifetime (hours) | 10000 |
| Warranty | 1 year |

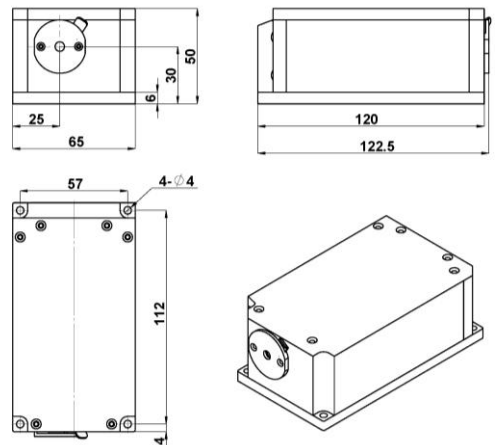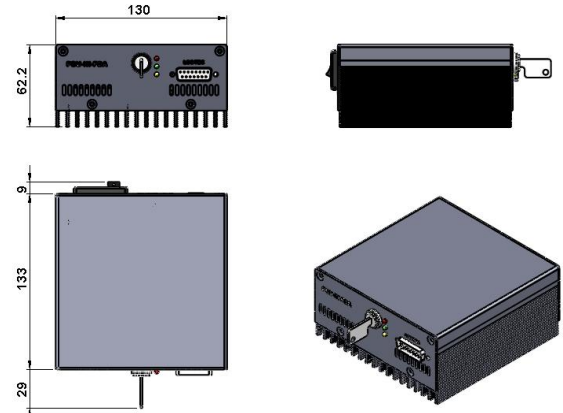

| MDL-C-400 | PSU-III-FDA |
|---|--|
|  <p>122.5(L) ×65(W) ×50 (H) mm³, 1.0kg</p> |  <p>171(L) ×130(W) ×62.2 (H) mm³, 1.2kg</p> |