

HPL-MIR-4200/1~2W

**WATER COOLING LD PUMPED
ALL-SOLID-STATE
3-5μm MID-IR LASER**




CNI's wide spectral width laser at 3-5μm mid-infrared features high power, high repetition rate, and short pulse duration, they are widely used in defense, remote sensing, civilian applications, and systems for counter-measures against infrared sensors, ..., etc.



SPECIFICATIONS

Wavelength (nm)	4200 ± 100
Spectral width (nm)	200
Average power (W)	1, 2
Operating mode	Pulsed (Q-switched)
Power stability (rms, over 4 hours)	<5%, <10%
Rep. rate (kHz)	10
Pulse duration (ns)	~20
Single pulse energy (mJ)	0.2 @ 10kHz, 2W
Peak power (kW)	~10 @ 10kHz, 2W
Beam divergence, full angle (mrad)	<6
Beam diameter at the aperture (1/e ² , mm)	<3
Beam height from base plate (mm)	61
Operating temperature (°C)	15~35
Power supply (90-264VAC)	PSU-MIR (3U)
Expected lifetime (hours)	10000
Warranty period	1 year

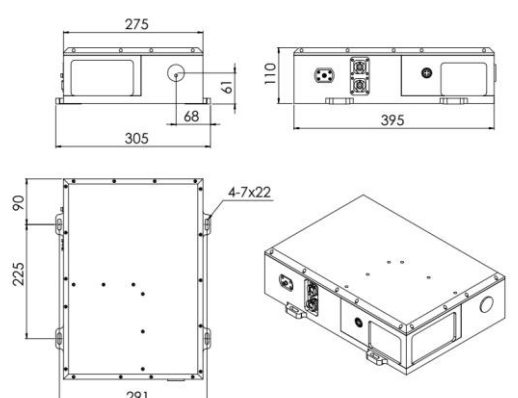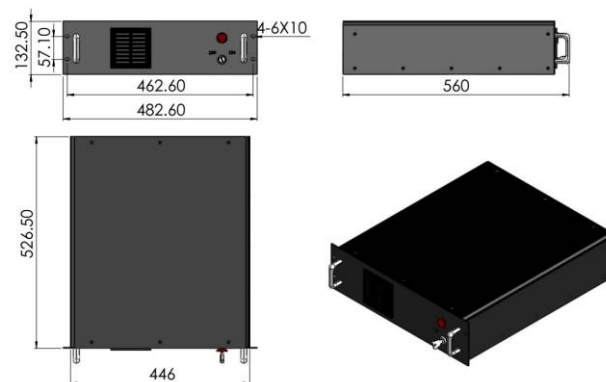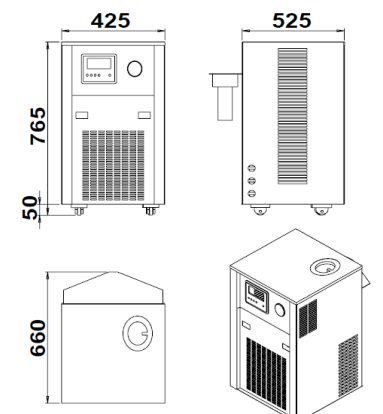

HPL-MIR	PSU-MIR (3U)	Water Chiller
 <p>395(L) × 305(W) × 110(H) mm³, 13.5kg</p>	 <p>527 (L) × 446(W) × 133 (H) mm³, 9.5 kg</p>	 <p>425 (L) × 525(W) × 765(H) mm³, 69kg</p>